

Fixing into the roof

Intermediate and endlap fixings positions



Fixing into walls

Intermediate and endlap fixings positions



Roof side lap fixing positions




Wall side lap fixing positions





Wall cladding fixing positions

For wall cladding, fixings must be located in the centre of the corrugation valleys rather than at the peaks. When using corrugated profile sheets as wall cladding, the same overlap and side-lap requirements apply.

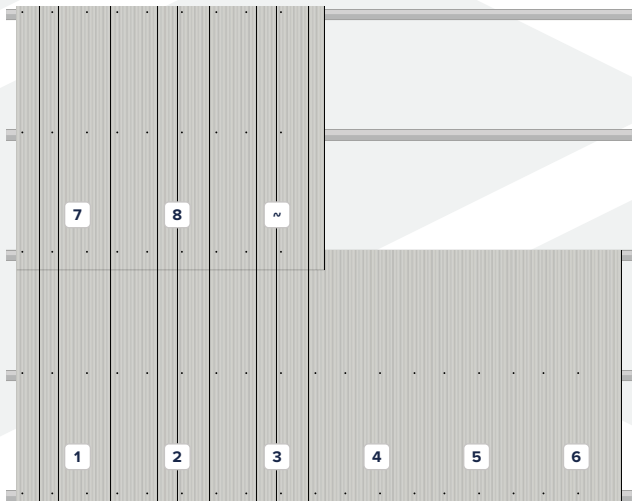

Lay left to right →

Lay left to right →

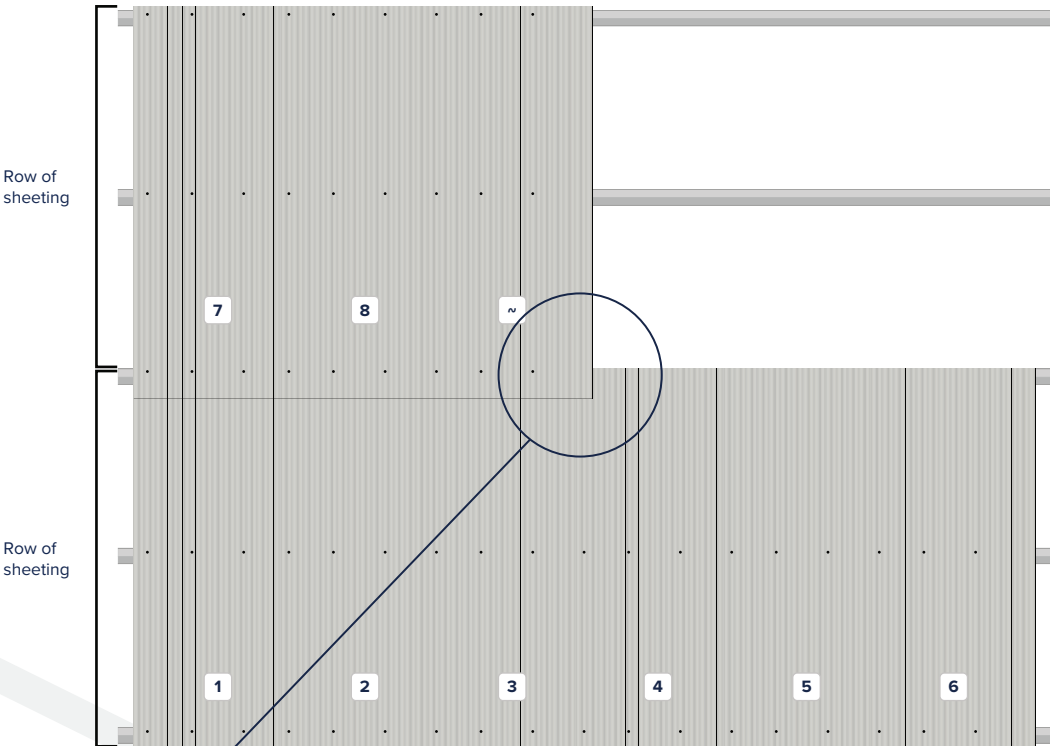

Overlap detail

Sheet end-laps must be set to a minimum of 200 mm above the top edge of the sheet beneath, or positioned at least 100 mm from the centre of the purlin.

Custom length corrugated profile sheets

At our manufacturing centre in Highbridge, we can make your corrugated profile sheeting to the exact measurement you require. In most scenarios, you can use one sheet to cover the entire span of the building (therefore not needing to overlap two sizes).

