
TILEFORM TECHNICAL DATASHEET

TILE-EFFECT STEEL ROOF SHEET · ROOFS ONLY

SECTION One orientation, colour side up, for roofs

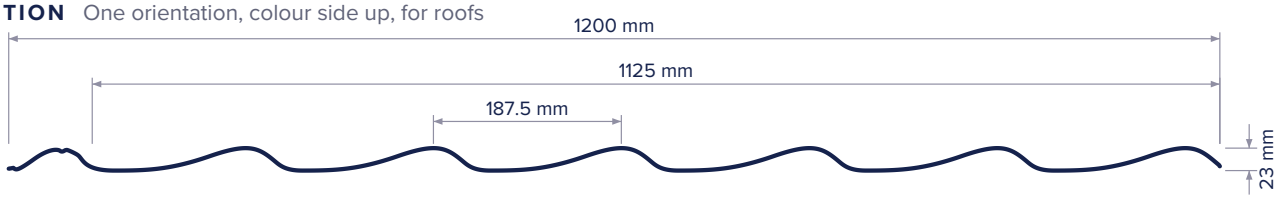

SPECIFICATION

TileForm · tile-effect roof sheet

Trade name	Pantile 23/1125 M350
Overall width	1200 mm
Cover width	1125 mm
Profile depth	23 mm
Roll pitch	187.5 mm
Tile module	350 mm along the slope; step 20 mm
Material	Steel, 0.6 mm
Finish	Matt Surface Texture
Colours	Anthracite, Black, Terracotta
Use	Roofs only
Lengths	Cut to length in whole tiles: 0.35 m minimum; 6 m maximum
Minimum roof pitch	12 degrees
Purlin centres	700 mm maximum, every second tile
Side lap	One full profile, with mastic lapping tape
End lap	600 mm minimum, with a purlin under it
Fixings	Self-drilling, self-sealing screws through the valleys
Weight	6.5 kg per metre of sheet; about 5.8 kg/m^2 of roof covered

DECLARED PERFORMANCE

External fire performance	TBC
Reaction to fire	TBC
Declaration of Performance number	TBC

No UK Declaration of Performance has been issued for this product yet. Each row above is to be confirmed before this datasheet is issued.

PERMISSIBLE LOADS

Load data	TBC. No load data has been confirmed for this product.

BRIARWOOD PRODUCTS LTD
Briarwood Business Park, Commerce Way
Walrow Industrial Estate, Highbridge, Somerset, TA9 4AG
Company number 02900287

Tel: +44 (0)1934 641446
sales@briarwoodproducts.co.uk
www.briarwoodproducts.co.uk
VAT registered number 634 4360 51